

# FloBoss™ 107 8-Point AI/DI Module


The 8-point analog input / discrete input (AI/DI) module for the FloBoss™ 107 Flow Manager (“FB107”) provides eight single-ended analog or discrete inputs. The I/O assembly mounts directly into the FB107 chassis. Use ROCLINK™ 800 Configuration Software to configure each individual channel.

You can install I/O modules in slots 1 through 3 on the main FB107 and in slots 4 through 6 on the expansion rack. When a non-I/O module is installed in slot 1, you can also install an I/O module in slot 7 of the expansion rack.

The AI/DI module provides 24 Volts dc loop output power. The intent of the loop output power is to power devices that require 24 Volts dc to ground, allowing the external device to send the FB107 a 4 to 20 mA signal based on pressure, temperature, level, and such.

A software-selectable 250-ohm resistor for 4-20 mA measurement is included as part of the circuit. You select the 250-ohm resistor in the AI configuration of ROCLINK 800 software.

AI/DI modules have removable terminal blocks for convenient wiring and servicing. The terminal blocks can accommodate size 16 to 24 American Wire Gauge (AWG).

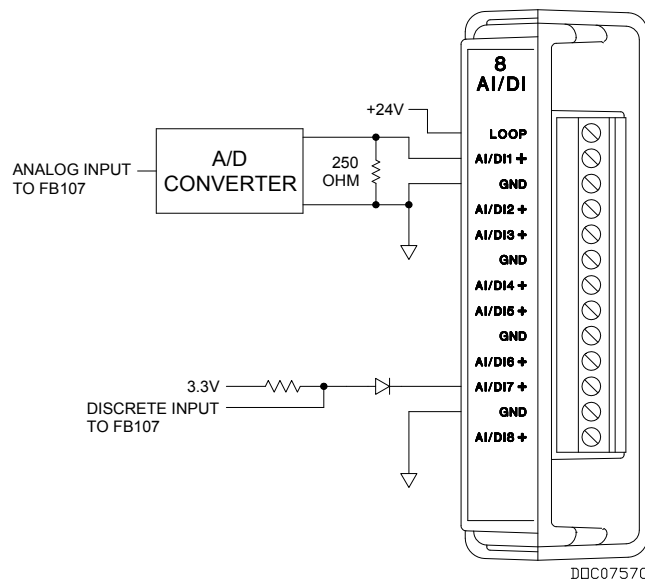


Internal Circuitry, 8-Point AI/DI Module

D301464X012

# Technical Specifications

## FB107 8-Point AI/DI Module

### Field Wiring Terminals

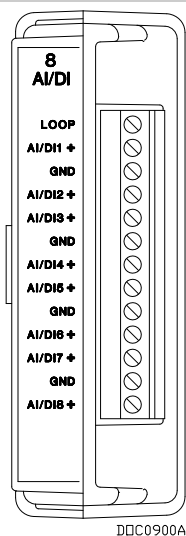

Terminal	Label	Definition
1	LOOP	Loop Power
2	AI/DI1 +	Positive
3	GND	Ground
4	AI/DI2 +	Positive
5	AI/DI3 +	Positive
6	GND	Ground
7	AI/DI4 +	Positive
8	AI/DI5 +	Positive
9	GND	Ground
10	AI/DI6 +	Positive
11	AI/DI7 +	Positive
12	GND	Ground
13	AI/DI8 +	Positive

### Analog Inputs

Quantity	Eight channels, individually software selectable as either an analog input or discrete input.
Type	Single-ended, voltage-sense analog inputs (software-configurable resistor for current loop).
Resolution	12 bits
Input Range	Software-configurable as 0 to 5 Vdc or 4 to 20 mA with the 250Ω resistor selected.
Isolation	None
Filter	Single-pole, low-pass.
Protection	Current limit protection on loop power output. Surge protection on all inputs.
Reference Accuracy <sup>1</sup> (after calibration) at 20°C (68°F)	±0.1%
Accuracy <sup>1</sup> Over Operating Temperature Range [-40 to 65°C (-40 to 149°F)]	±0.3%

### Discrete Inputs

Quantity	Eight channels, individually selectable as either an analog input or discrete input.
Type	Contact-sense discrete input.
Current Rating	35 μA in the active (on) state, 0 μA in the inactive (off) state.
Isolation	None
Frequency	10 Hz maximum
Sample Period	1.0 second minimum

1. Includes: Linearity, Hysteresis, Repeatability, and Stability. Accuracy based on 1-5 Vdc (4-20 mA) operating range.

## Power

Consumption 145 mW to 3.9 watts based on load.

Loop Power Provides 24 Vdc loop output power @ 200 mA maximum.

## Physical

Dimensions 82.55 mm H by 25.4 mm W by 127 mm L  
(3.25 in. H by 1.0 in. W by 5.0 in. L)

Weight 68 g (2.4 oz.)

Wiring 16 to 24 AWG at the removable terminal block.

## Environmental

Same as the unit in which it is installed.

## Approvals

Same as the unit in which it is installed.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions ("RAS"), a division of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of RAS. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. RAS reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by RAS' terms and conditions which are available upon request. RAS does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any RAS product remains solely with the purchaser and end-user.

**Emerson Process Management**  
**Remote Automation Solutions**  
Marshalltown, IA 50158 U.S.A.  
Houston, TX 77041 U.S.A.  
Pickering, North Yorkshire UK Y018 7JA

