

Earn More Revenue From Natural Gas Production



Earn More Revenue From Natural Gas Production

Created with your needs in mind, Fisher® control valves and instruments offer significant benefits for upstream gas production facilities. Among these are:

Maximum Uptime - Increased uptime at a production facility earns more revenue. You can realize maximum uptime when you install Fisher control valves and instruments. They are engineered to deliver long-lasting quality and durability to meet your immediate and long-term needs to produce more gas.

Safety - Standards for safety have become more stringent for control valves and instruments. There are emission control standards and the Canadian Standards Association “single seal” and “explosive-fluid seal” requirements. Be equipped to meet government safety guidelines with Fisher control valves and instruments.

Fisher D2, D3, and D4 valves offer protection if disassembly of the bonnet/valve body connection is inadvertently started while there is still pressure in the valve body. The design allows internal pressure to be vented while keeping the actuator retained to the valve body.

Energy Responsible - Using natural gas as a supply medium for pneumatic instruments may be your only option in places where it is not possible, economical, or convenient to install a compressed air system. When using natural gas for supply, energy responsible Fisher instruments with their low consumption dramatically decrease the amount of natural gas vented to the atmosphere. Containment of this natural gas means less methane impacts the environment.

Bottom Line Results - You can realize maximum uptime, safer operations, and lower energy use with Fisher oil and gas equipment. What’s more, the equipment is easy to install and is cost effective for you.



4660 High-Low Pressure Pilot

- Reliably activates shutdown systems with Bourdon tube sensing element
- Near zero steady-state gas consumption under normal conditions with block-and-bleed relay assembly



i2P-100 Electro-Pneumatic Transducer

- Canadian Standards Association, U.S. Factory Mutual, ATEX and IEC approvals for use with natural gas
- Separate electrical termination compartment to keep process gas from entering conduit systems
- Low steady-state gas consumption




D2 FloPro™ Control Valve

- Field-selectable flow rates allow adjustment of the flow capacity without changing the trim
- NACE MR0175/ISO 15156 service-ready
- ENVIRO-SEAL® packing technology for excellent emissions control



4195K Series Pressure Controller

- Superb performance capability
- Low steady-state gas consumption 0.094 m³/hr (3.5 scfh)
- Broad offering of input ranges with proportional, reset, and rate control functions

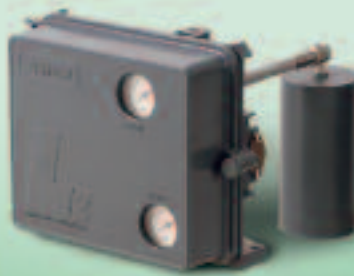

L2sj Liquid Level Controller

- Low steady-state gas consumption < 0.01 m³/hr (< 0.3 scfh)
- Integral action relay with rugged metal seals provides more dependable control, which can improve uptime
- Simplified dry and wet setup and adjustments



C1 Pneumatic Pressure Controller

- Dependable control performance
- Durable design with stainless steel bellows, tubing, and relay trim
- Reduced steady-state gas consumption—one-tenth that of its predecessor—making it an energy efficient choice



D3 FloPro Control Valve

- Field-selectable flow rates allow adjustment of the flow capacity without changing the trim
- NACE MR0175/ISO 15156 service-ready
- ENVIRO-SEAL packing technology for excellent emissions control




D4 Control Valve

- Ideal for throttling control of liquids or gases that are gritty or sticky
- NACE MR0175/ISO 15156 service-ready
- ENVIRO-SEAL packing technology for excellent emissions control



FIELDVUE Natural Gas Certified

- Integral wiring gland meets FM and CSA single seal requirements per ANSI/ISA 12.27.01
- Rigorous certification testing
- Low bleed relay can decrease steady-state gas consumption by up to 83%

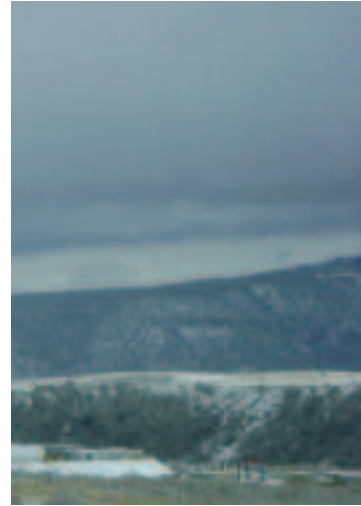

© Fisher Controls International LLC 2009 All Rights Reserved.

Fisher, FloPro, ENVIRO-SEAL, and FIELDVUE are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice. Neither Emerson, Emerson Process Management, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end-user.

NORTH AMERICA

Emerson Process Management
Marshalltown, Iowa 50158 USA
T 1 (641) 754-3011
F 1 (641) 754-2830
www.EmersonProcess.com/Fisher

LATIN AMERICA

Emerson Process Management
Sorocaba 18087 Brazil
T +(55)(15)3238-3788
F +(55)(15)3228-3300
www.EmersonProcess.com/Fisher

EUROPE

Emerson Process Management
Chatham, Kent ME4 4QZ UK
T +44 (0)1634895800
F +44 (0)1634895842
www.EmersonProcess.com/Fisher

MIDDLE EAST & AFRICA

Emerson FZE
Dubai, United Arab Emirates
T +971 4 883 5235
F +971 4 883 5312
www.EmersonProcess.com/Fisher

ASIA PACIFIC

Emerson Process Management
Singapore 128461 Singapore
T +(65) 6777 8211
F +(65) 6777 0947
www.EmersonProcess.com/Fisher

