

FlowScanner™ Linear Travel Transducer

FlowScanner Linear Travel Transducers are used to accurately measure linear valve travel, which is essential for diagnostic testing. Extending or retracting the cable rotates a shaft connected to a digital encoder producing a digital output signal. These unique linear-to-rotational, industrial-grade string encoder modules allow for versatility in valve position measurement both in the field and shop environments.

FlowScanner Linear Travel Transducers are cable actuated position sensors that are typically mounted temporarily to a control valve assembly for diagnostic testing. Valve diagnostic tools, such as the FlowScanner 6000 and QUIKLOOK 3-FS, have digital input channels to allow the Linear Travel Transducer to be utilized. Valve travel is a vital characteristic to all control valves and significantly important to accurately measure during diagnostic testing.



X1355

Figure 1. Mounted Linear Transducer

Features

- **High Resolution**—The 2-1/2 inch diameter encoder allows for a resolution of 0.0001 inch for both the 25- and 50-inch models. This provides critical detail when examining seating profiles.
- **Digital Quadrature Output**—The digital incremental quadrature output is a square waveform free of noise and drift. This output is viewed as pulses or counts, which are electronically counted to produce accurate readings.
- **Compensated Stroke Range**—Both models have cables longer than the specified measurement range to avoid damage from inadvertent over-extension and for improved accuracy to the end of the measurement range.
- **TEDS 'Plug-and-Play'**—Embedded memory chips can be used by valve diagnostic tools to recognize and automatically set the transducer's range, sensitivity, and calibration information. (Not used in FlowScanner 6000).
- **Compact design**—The cable and rotary encoder combination allow for easier placement than prior art. Legacy linear probe-type encoders are large, bulky, and could typically only measure 4 inches of change.




X1344

Table 1. Specifications

<p>Available Configurations</p> <p>25 Inch Linear Travel Transducer: P/N 19B2908X022 50 Inch Linear Travel Transducer: P/N 19B2908X062</p> <p>Electrical Specifications</p> <p>Input: Supply Voltage 5 to 28 VDC Output: Incremental Encoder Connection: Industrial 10-pin Circular Connector</p> <p>Performance Specifications</p> <p>Standard Sensitivity: 2500 PPI (± 10 pulses) Resolution: 0.0001 inch (using standard 4x quadrature) Calibrated Accuracy: ± 0.0065 inch over measurement range (25 inch) ± 0.0130 inch over measurement range (50 inch)</p>	<p>Environmental Specifications</p> <p>Storage Temperature: -25 to 90°C (-13 to 194°F) Operating Temperature: 0 to 70°C (32 to 158°F) Operating Humidity: 0 - 98% RH without condensation</p> <p>Mechanical Specifications</p> <p>Construction: Powder Painted Aluminum Weight: Less than 1.1 kg (2.5 lb) Dimensions: see figure 2 Cable (String): 0.034 inch coated stainless steel rope Cable Length: 40 inches (25 inch model) 60 inches (50 inch model) Cable Eyelet: 0.191 inch inside diameter, stainless steel Cable Tension: $17 \pm 8.5\text{oz}$. 5g max acceleration (higher tension special order)</p>
---	--

Figure 2. Dimensions

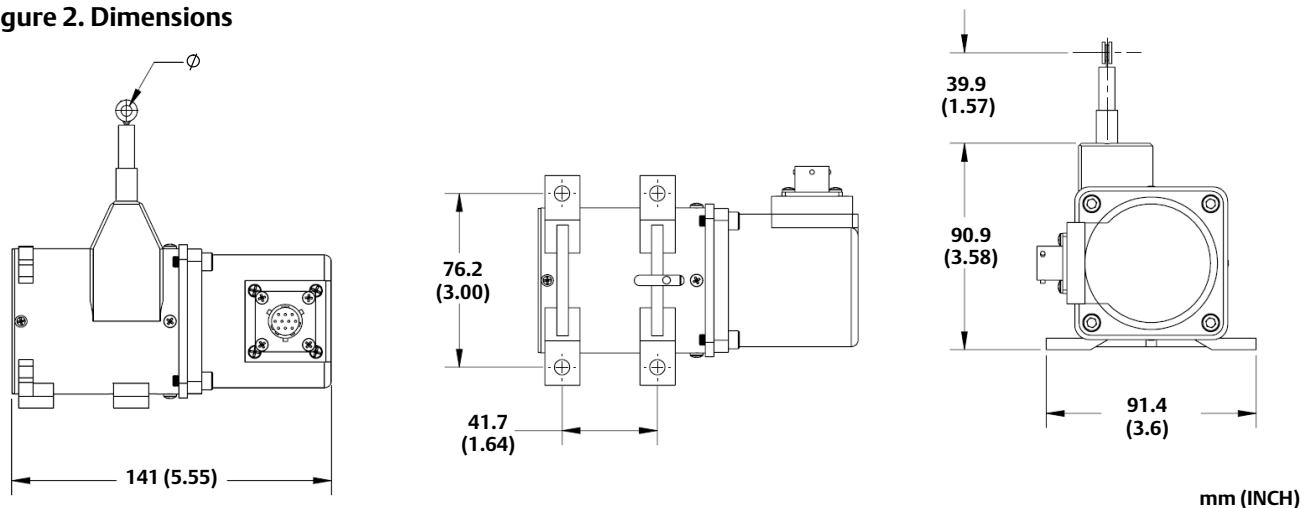

Neither Emerson, Emerson Automation Solutions, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

FlowScanner and Fisher are marks owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson Automation Solutions, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Automation Solutions
Marshalltown, Iowa 50158 USA
Sorocaba, 18087 Brazil
Cernay, 68700 France
Dubai, United Arab Emirates
Singapore 128461 Singapore

www.Fisher.com

