


# Tank Blanketing and Vapor Recovery Solutions

## Application Map

### Features

- Pilot-Operated Systems Offer:
    - Extremely low setpoints and high accuracy. Greater capacity for large tanks and/or pump rates.
  - Direct Operated Systems Offer:
    - Low initial cost. Straightforward design with fewer components.
    - Extremely fast speed of response with near infinite turndown.
    - Good Rangeability.
  - Fully Balanced Systems
- Highest Capacity:
    - Flows up to 2.8 Million SCFH / 75,000 Nm<sup>3</sup>/h
  - High Sensitivity
  - In-Line Maintenance
  - Inlet Pressure Ratings up to 300 psig / 20.7 bar
  - Setpoints as Low as -5 in. w.c. / -12 mbar
  - Broad Material Selection
  - Tight Shutoff

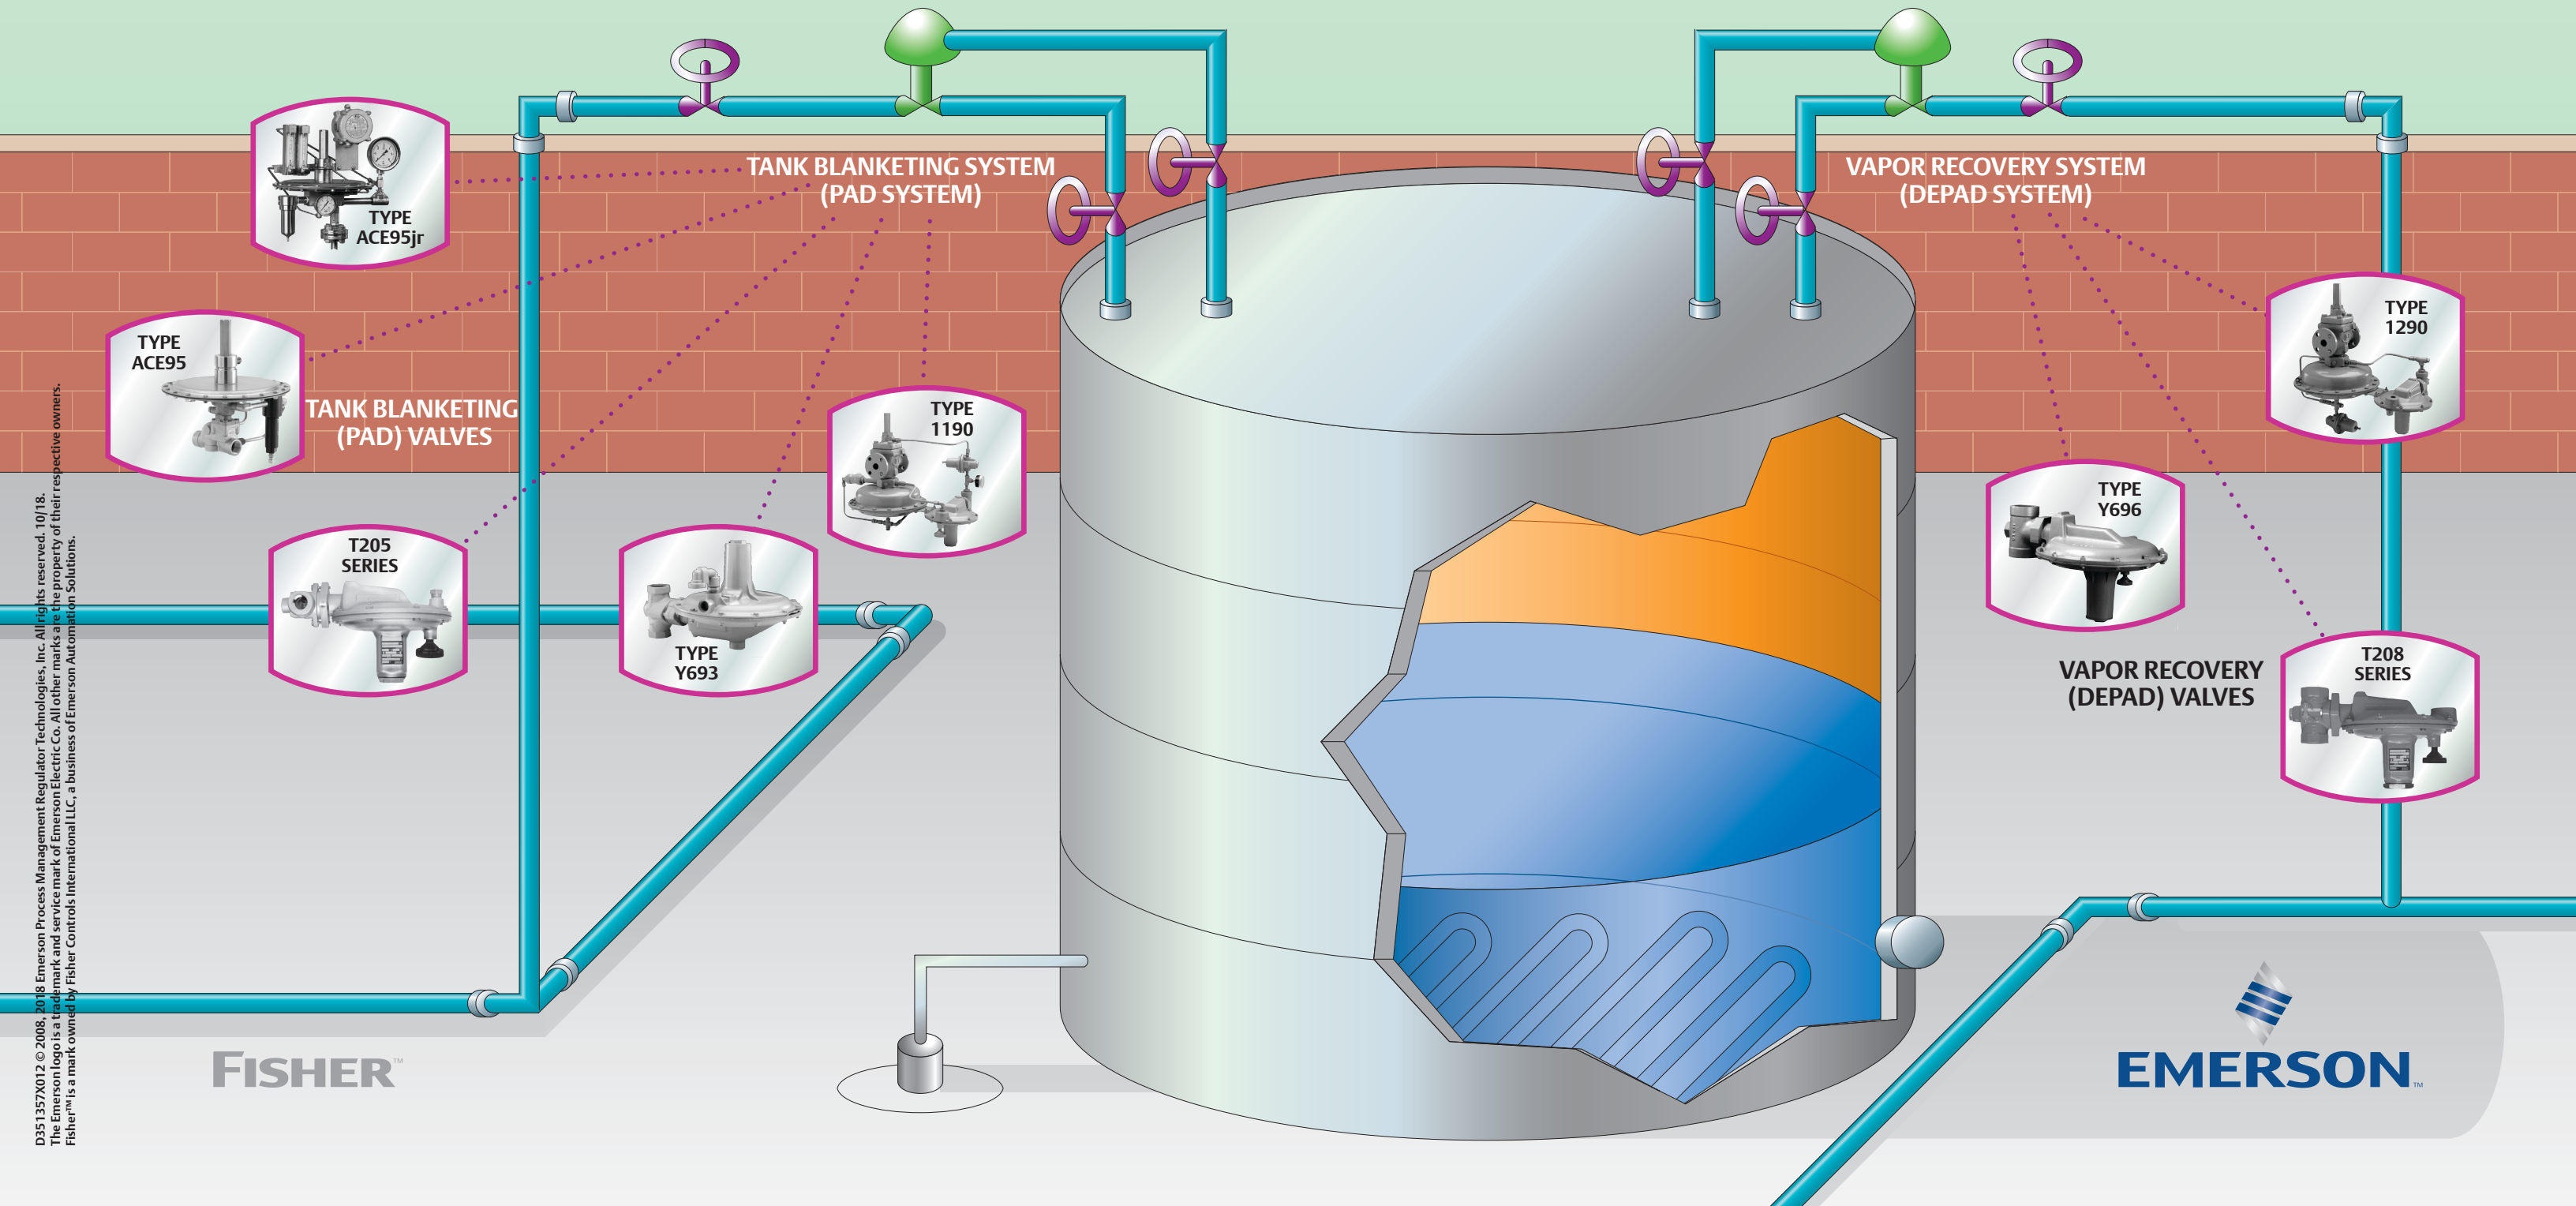

D351357X012 © 2008, 2018 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 10/18.  
 The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.  
 Fisher™ is a mark owned by Fisher Controls International LLC, a business of Emerson Automation Solutions.

**FISHER™**

**EMERSON™**