

MVS205 Multi-Variable Sensor

The MVS205 Multi-Variable Sensor (MVS205R) provides static pressure, differential pressure, and process temperature inputs to a ROC800-Series, FloBoss™ 107, ROC300-Series, FloBoss 407, or FloBoss 500-Series Flow Manager. The inputs from an MVS205 transmitter are used for differential pressure type calculations. The MVS205 typically operates as a remote device that communicates via a serial format.

Variables

Functionally, the MVS205 is a digital transmitter that measures three flow-related variables simultaneously: differential pressure, static pressure, and temperature. These variables are continuously available to the FloBoss or ROC unit that polls the MVS205.

An external three or four-wire Resistance Temperature Detector (RTD) senses the process temperature. **The RTD sensor connects directly to the interface circuit board** of the MVS205 transmitter. Connection requires user-supplied RTD field wiring.

Transducer and Interface Circuit

The MVS205 contains a transducer and an interface circuit. The transducer, contained in the sensor body, uses capacitance-cell technology to sense differential pressure and piezoresistive technology to sense the static (absolute or gauge) pressure.

The transducer electronics convert the pressure variables directly into a digital format, allowing accurate correction and compensation. A microprocessor linearizes and corrects the raw

pressure signals (from the sensor) using characterization data stored in non-volatile memory.

The interface circuit, contained in the electronics head, converts the raw temperature from an RTD into digital format. The interface circuit also allows the MVS205 to communicate the digital pressure signals to a ROC or FloBoss using a serial EIA-485 (RS-485) connection. An explosion-proof electronics head encloses the interface circuit board.

Note: The MVS205 has a 10-pin terminal block that allows case isolation. For more information, refer to *MVS205 Case Isolation Installation Sheet* (Form A6277).

Accuracy


Two versions of the pressure transducer used in the MVS205 transmitter are available:

- 205P with reference accuracy of 0.075% of the full span.
- 205E with reference accuracy of 0.10% of the full span.

Mounting

Attached to the bottom of the sensor body is a Coplanar™ flange. This flange, which provides drain and vent valves, allows the MVS205 to mount on a pipestand, on a wall or panel, or on an integral orifice assembly or manifold valve.

Note: CE marked assemblies come with cover clamps installed on both ends of the MVS205 to comply with ATEX and IECEx.

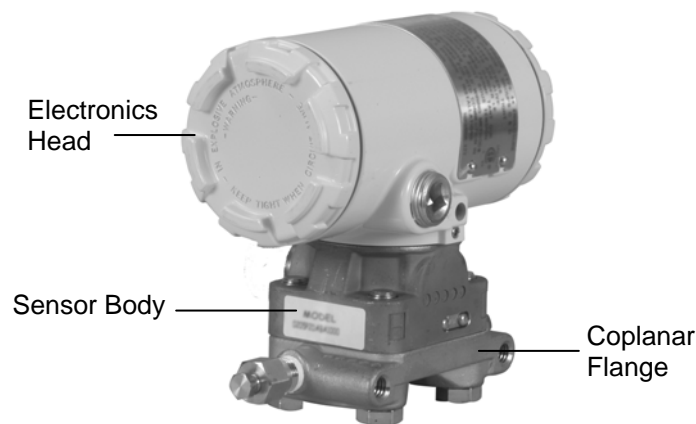



MVS205 Multi-Variable Sensor
W8826-A

MVS205 Multi-Variable Sensor

Differential Pressure Input			
Range ¹	0 to 62.2 kPa (0 to 250" H2O) 0 to 248.8 kPa (0 to 1000" H2O)		
Reference Accuracy	205E (10:1 rangeability allowed)	Turndowns from 1:1 to 10:1 of URL	±0.10% of span
		Turndowns from 10:1 to 100:1 of URL	Not allowed
	205P (100:1 rangeability allowed)	Turndowns from 1:1 to 10:1 of URL	±0.075% of span
		Turndowns from 10:1 to 100:1 of URL	±[0.025 + 0.005(URL/Span)]% of span
Stability	±0.125% of URL for five years, with up to ±50°F (28°C) ambient temperature changes and up to 1000 psi (68,9 bar) line pressure		
Ambient Temperature Effect per 50°F (28°C)	Spans from 1:1 to 30:1	±(0.025% URL + 0.125% of span)	
	Spans from 30:1 to 100:1	±(0.035% URL + 0.175% of span)	
Static Pressure Effects	Zero error	±0.05% of URL per 1000 psi (68,9 bar)	
	Span error	±0.20% of DP Reading per 1000 psi (68,9 bar)	
Over-Pressure Limit	3,626 psi (250 bar) applied on either or both sides without damage to the sensor		
Burst Pressure Limit	10,065 psi (694 bar)		
Static Pressure Input			
Range	Either Absolute or Gauge: 0 to 5516 kPa (0 to 800 psia/psig) 0 to 25,000 kPa (0 to 3626 psia/psig)		
Reference Accuracy	205E (10:1 rangeability allowed)	Turndowns from 1:1 to 10:1 of URL	±0.10% of span
		Turndowns from 10:1 to 100:1 of URL	Not allowed
	205P (100:1 rangeability allowed)	Turndowns from 1:1 to 10:1 of URL	±0.075% of span
		Turndowns from 10:1 to 100:1 of URL	±[0.03 + 0.0075(URL/Span)]% of span
Stability	±0.125% of URL for five years, with up to ±50°F (28°C) ambient temperature changes		
Ambient Temperature Effect per 50°F (28°C)	Spans from 1:1 to 30:1	±(0.05% URL + 0.125% of span)	
	Spans from 30:1 to 100:1	±(0.06% URL + 0.175% of span)	
Over-Pressure Limit	Same as URL		
Process Temperature Input			
Type	For 3- or 4-wire platinum 100-ohm RTD (conforming to IEC 751 Class B), with $\alpha = 0.00385$		
Range	-40 to 400°C (-40 to 752°F)		

1. Consult factory for special ranges and materials which may be available. For example, 0 to 6.22 kPa (0 to 25" H2O) at ±0.10% reference accuracy.

Reference Accuracy	±0.28°C (±0.5°F), exclusive of RTD sensor error. Note: Includes linearity, hysteresis, and repeatability effects.	
Excitation Current	1.24 mA	
Output		
EIA-485 (RS-485)	Asynchronous serial communication using Modbus protocol for up to 605 m (2000 ft) distance	
Power		
Input at 0 to 75°C (32 to 167°F)	8 to 30 Vdc, 200 mW average	
Input at -40 to 0°C (-40 to 32°F)	8.5 to 30 Vdc, 200 mW average	
Physical		
Dimensions	147 mm H by 163 mm W by 84 mm D (5.8 in. H by 6.4 in. W by 3.3 in. D)	
Weight	3.0 kg (6.7 lb), including head	
Vibration Effect	Sensor outputs shall not shift more than +0.1% of upper range limit per g from 5 to 2000 Hz in any axis when tested per IEC 770, Section 6.2.14.	
Construction	Standard	Transducer is all stainless steel construction with silicone fill fluid, 316L diaphragms and glass-filled PTFE o-rings. Electronics head is A360 Aluminum with urethane coating.
	Optional	Transducer includes Hastelloy C-276 wetted parts (construction is NACE compliant per MR0103 and ISO15156/MR0175), inert fill fluid
Mounting	Pipestand	Mounts on 50 mm (2 in.) pipe with U-bolt and optional flange bracket
	Wall or Panel	Mounts with optional flange bracket, bolted on 71 mm (2.8 in.) centers
Connections	Conduit	Head has two 1/2-inch NPT connections
	Process	1/4-18 NPT on 2-1/8 inch centers (on coplanar flange)
Environmental		
Operating Temperature	-40 to 75°C (-40 to 167°F)	
Storage Temperature	-50 to 100°C (-58 to 230°F)	
Operating Humidity	0 to 99%, non-condensing	
Process Seals per ANSI/ISA 12.27.01	Meets requirements for a Single Seal device as defined by ANSI/ISA 12.27.01. Installation must adhere to the following process temperature limits.	
Process Temperature (at transmitter isolator flange)	Standard Silicone Fill Sensor	-40 to 100°C (-40 to 212°F)
	Inert Fill Sensor	-18 to 85°C (0 to 185°F)
<p>Note: Process temperatures above 85°C (185°F) require you to lower the product's maximum ambient temperature rating by a 1.5:1 ratio. To determine the adjusted maximum temperature rating, perform the following calculation:</p> <p>Adjusted max Tamb = Product Max Tamb - [(Actual Process Tamb - 85°C (185°F)) * 1.5]</p> <p>Example: Adjusted Max Tamb = 75°C - [(95°C - 85°C) * 1.5] = 60°C.</p>		

Approvals		
Product Markings for Hazardous Locations	CSA C/US	Class I, Division 1, Groups C and D. Class I, Division 2, Groups A, B, C, and D, T5 (Tamb=70°C [158°F]), T4 (Tamb=75°C [167°F]). Type 4X.
	CE Marked	Ex d IIB T5 (Tamb=75°C) Ex tD A21 IP66 T85°C  II 2 GD.  0081. ATEX Cert. KEMA 04ATEX2182 X IEC Cert. IECEx KEM 07.0055X
Approval Standards	CSA/UL	CSA C22.2 No. 30 CSA C22.2 No. 213 UL 1203, UL 1604 ANSI/ISA 12.27.01-2003
	EMC	EN 61000-4-2 (2001) EN 61000-4-3 (2002) EN 61000-4-4 (1995) EN 61000-4-5 (2001) EN61000-4-6 (2003)
	ATEX	EN 60079-0 (2006) EN 60079-1 (2007) EN 61241-0 (2004) EN 61241-1 (2006)
	IECEX	EN 60079-0 (2004 Edition 4) EN 60079-1 (2007-04 Edition 6) EN 61241-0 (2004 Edition 1) EN 61241-1 (2004 Edition 1) EN 60529 (2001)
	Measurement (Industry) Canada	Approved for use with approved flow computers. Approved as MVS205R Series Remote Sensors (Measurement Canada approval #AG-0412).
Miscellaneous Approval Certificates	Canadian Registration to Category 'F' Fittings	CRN 0F7768 Note: Applies to all Canadian provinces and territories.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions ("RAS"), a division of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of RAS. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. RAS reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by RAS' terms and conditions which are available upon request. RAS does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any RAS product remains solely with the purchaser and end-user.

Emerson Process Management
Remote Automation Solutions
 Marshalltown, IA 50158 U.S.A.
 Houston, TX 77041 U.S.A
 Pickering, North Yorkshire UK Y018 7JA

