

FloBoss™ 107 LCD Touchpad

The FloBoss™ 107 LCD Touchpad is a transreflective user interface that provides touch screen access to the process and operational information contained in a FloBoss 107. It allows you to view and change parameters in the unit directly from the touch-sensitive display. The Touchpad displays real-time and historical charts to provide you with a visual representation of data contained in the FB107.


Touchpad

The Touchpad consists of an eight-line by twenty-one character display. The Touchpad is transreflective for improved sunlight readability, and backlit for enhanced ambient light readability.

You can browse through lists or screens and enter numeric values by simply touching the LCD. The Touchpad shows measurement values in real-time. You can make configuration changes to numeric values through the Touchpad.

Modes

You can configure the Touchpad to display information in two different modes – Normal and BLM (Basic List Mode). Under Normal mode, a logon prompt displays before any data is viewable. With BLM mode, a user-configured auto-scrolling list of read-only data displays before you are required to logon.

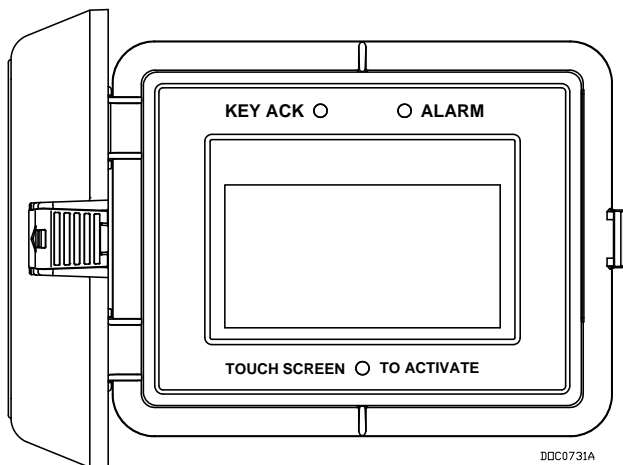

FloBoss 107 LCD Touchpad

Charts

You can configure real-time dynamic and historical charts to display on the Touchpad using ROCLINK™ 800. Additionally, by simply touching the engineering units in the menu or user lists displayed on the Touchpad, you can view real-time charts for most values.

Screens

Easy-to-navigate menus and screens allow access to the most commonly used parameters. You can add, delete, and modify viewed items using ROCLINK 800 Configuration Software.

The default screens of the main menu provide the following:

- User list information.
- Meter run information.
- Proportion, Integral, and Derivative (PID) loop and Function Sequence Table (FST) control.
- History charts and graphing.
- Input and Output (I/O) information.
- System information.
- Integrity and alarm conditions.
- Contrast Control.

Security

Configure security for the Touchpad in ROCLINK 800, which allows you to customize individual user access. You can set user access to view and edit parameters, to view parameters only, or to not view parameters for up to 16 users. Typically, user access assignment is based on an individual user's preferences.

Connections to FloBoss

The FloBoss 107 communicates with and powers the Touchpad through the Display port on the FloBoss 107 unit.

Mounting

The Touchpad has CSA Class I, Division 2 approval and can be mounted on a panel or on a Type 4 enclosure.

Option

The Touchpad may be installed on an optional enclosure available from Remote Automation Solutions. For more information, contact your local sales representative.

Technical Specifications

FB107 LCD Touchpad

Physical	
Touchpad	128 x 64 pixel, backlit, liquid crystal display.
LEDs	Red LED Displays alarm or integrity alerts.
	Green LED Displays positive key press indication.
Communications	Connects to the FB107's Display port, maximum cable length of 15 m (50 ft).
Housing	PBT/Polypropylene, UV stabilized.
Dimensions	111 mm H x 140 mm W x 25 mm D (4.38 in. H x 5.5 in. W x 1.0 in. D)
Weight	0.23 kg (0.51 lbs)
Mounting	Suitable for panel or enclosure mounting.
Power	
Input Power (from the FB107's display port)	Normal Idle Mode 120 mW
	Low Power Mode 42 mW
	Input Voltage 8 to 30 Vdc
Environmental	
Operating Temperature	-20 to 70°C (-4 to 158°F)
Storage Temperature	-30 to 85°C (-22 to 185°F)
Operating Humidity	0 to 95% relative humidity, non-condensing.
Radiated/Conducted Transmissions	Meets the requirements of IEC 61326 Electrical equipment for use in industrial locations.
Radiated Emissions	Meets FCC Part 15, Class A.
Vibration	Tested to ISA 75.13 1996 with an abbreviated endurance dwell test.
Approvals	
Product Markings for Hazardous Locations (North America)	Class I, Division 2, Groups A, B, C, and D. CSA Type 4 rating when installed on enclosure per included installation sheet <i>Form A6236</i> .

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions ("RAS"), a division of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of RAS. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. RAS reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by RAS' terms and conditions which are available upon request. RAS does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any RAS product remains solely with the purchaser and end-user.

Emerson Process Management
Remote Automation Solutions
 Marshalltown, IA 50158 U.S.A.
 Houston, TX 77041 U.S.A.
 Pickering, North Yorkshire UK Y018 7JA

