

# FloBoss™ 107 Dial-Up Modem Module

The Dial-Up Modem Module for the FloBoss™ 107 Flow Manager (“FB107”) provides communication over a Public-Switched Telephone Network (PSTN) at up to 2400 bits per second (bps).


The module plugs into the main board of the FB107, which provides power and control signals to activate COM2 or COM3.

You can install a communication module in slot 1 or 2 on the main FB107. When a communication module is installed in slot 2, the communication port (COM2) on the CPU is redirected to the type of module installed in slot 2. Use ROCLINK™ 800 Configuration Software to configure the modules.

Each communication module uses a separate channel from the other modules and has a common ground (“single-ended”). The field interface protects the electronics in the module.

The FB107 supports multiple communication protocols, including ROC protocol and Modbus protocol. An FB107 can act as a Modbus slave device (ASCII or RTU) on COM2 or COM3.


All modules have removable terminal blocks for convenient wiring and servicing. The terminal blocks can accommodate size 16 to 24 American Wire Gauge (AWG).

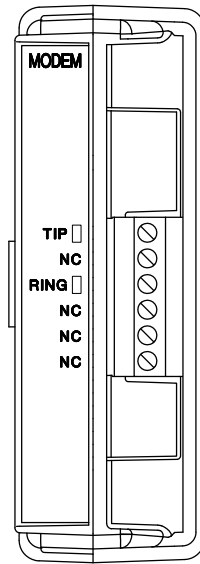

Dial-up Modem Module

## FloBoss 107 Dial-Up Modem Module

### Field Wiring Terminals

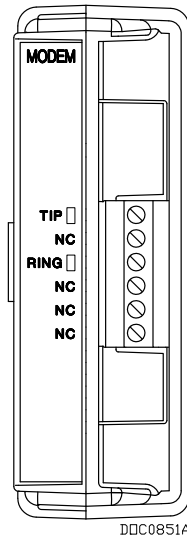

Terminal	Label	Definition
1	TIP	Tip
2	NC	No Connection
3	RING	Ring
4	NC	No Connection
5	NC	No Connection
6	NC	No Connection

DDC0851A

### Communication

Type	Full-duplex 2-wire for dial-up PSTN.
Connector	Screw type.
Modem Standards	Bell 212A, Bell 103, V.22bis, V.22, V.21.
Data Rate	Up to 2400 bps asynchronous.
LED Indicators	Tip (Transmit) Ring (Receive)
Certification	FCC Part 68 approved.
Ring Voltage Detected	38 to 150 RMS, type B ringer.
Ring Frequency Detected	15.3 to 68 Hz, type B ringer.
Telephone Loop Current	20 to 100 mA when off-hook.
Data Transmit Level	-12 to -9.0 dBm, -10.5 typical.
DTMF Transmit Level	-2.5 to 0 dBm, average over 3 second interval.
Surge Protection	Conforms to FCC Part 68.

### Physical

Dimensions	82.55 mm H by 25.4 mm W by 127 mm L (3.25 in. H by 1.0 in. W by 5.0 in. L).
Weight	68 g (2.4 oz.).
Wiring	16 to 24 AWG at the removable terminal block.

### Power

Consumption	Main power supply loading at the battery terminals (at 12.0 Vdc):		
	Typical	Active	24 mW
		Idle	10 mW
Isolation	Per FCC Part 68.		

---

**Environmental**

Same as the FB107 in which it is installed.

---

**Approvals**

Same as the FB107 in which it is installed.

---

FCC Registration Number	US:FSRMR06B107, REN 0.6B.
-------------------------	---------------------------

---

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions ("RAS"), a division of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of RAS. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. RAS reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by RAS' terms and conditions which are available upon request. RAS does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any RAS product remains solely with the purchaser and end-user.

**Emerson Process Management**  
**Remote Automation Solutions**  
Marshalltown, IA 50158 U.S.A.  
Houston, TX 77041 U.S.A.  
Pickering, North Yorkshire UK Y018 7JA

---

© 2009 Remote Automation Solutions, division of Emerson Process Management. All rights reserved.

