

Fisher™ LCP100 Local Control Panel

The LCP100 local control panel is used in conjunction with the FIELDVUE™ DVC6200 SIS digital valve controller to manually open, close, or test a safety shutdown valve. The LCP100 has three protected pushbuttons to allow the user to open, close or test the safety valve. There are also three lights to visually indicate if the valve is open, closed, or locked in safety and ready for reset.

Features

Reliability

- **Rugged Enclosure**—The filled polyester enclosure, encapsulated electronics, pushbuttons, and lights are designed to withstand harsh industrial environments.
- **Proof Testing**—The open and close pushbuttons provide a means to manually perform an offline full stroke test to help identify dangerous undetected failures.
- **Partial Valve Stroke Test**—The test pushbutton provides a means to manually perform an online partial stroke test to help improve the diagnostic coverage factor.

Safety

- **Manual Reset**—After a safety demand, the DVC6200 SIS will remain locked in the safe state. The manual reset pushbutton provides user control over when the valve can return to the normal operating state.
- **Lockable Pushbutton Covers**—Each pushbutton can be locked to prevent unauthorized access to the safety valve operation.
- **Safety Certification**—The LCP100 contribution to failure rates is documented in the DVC6200 SIS safety manual.



FISHER LCP100 LOCAL CONTROL PANEL, WITH FIELDVUE DVC6200 SIS DIGITAL VALVE CONTROLLER AND BETTIS™ ACTUATOR

X0247

Ease of Use

- **Loop vs. External Power**—The LCP100 can be powered by the same loop as the DVC6200 SIS or independently powered by a 24 VDC source.
- **Simple Configuration**—The DVC6200 SIS setup wizard automatically configures the LCP100 functions.

Value

- **Visual Indication**—The LCP100 can be mounted remote from the valve in an easily accessible location to view the status and perform periodic testing.
- **Reduce I/O Count**—The LCP100 combines open/closed/ready-to-reset lights and open/close pushbuttons into a single field enclosure, thus eliminating 3 discrete out (DO) and 2 discrete in (DI) channels from the logic solver.

Specifications

Power Options (switch selectable)

- External: 24 VDC +/- 10% @ 50 mA maximum continuous current (100 mA maximum inrush)
- Loop: 8-20 mA (LCP100 and DVC6200 SIS combined)

Power Consumption

- External: 1.32 W max continuous
- Loop (Point-to-Point): 0.042 W max continuous
- Loop (Multi-Drop): 0.126 W max continuous

Temperature Limits⁽¹⁾

-40 to 65°C (-40 to 149°F)

Maximum distance between LCP100 and DVC6200 SIS digital valve controller

Cable length is limited by maximum cable capacitance of 100,000 pF⁽²⁾. Typical 314 meters (1030 feet) with 18 AWG shielded Audio, Control and Instrumentation Cable

Electrical Classification

CSA (C/US)

- AEx ia IIB T4 Ga⁽³⁾ – Zone 0, 1, 2
- AEx e mb [ib] IIC T4 Gb – Zone 1, 2
- AEx ic IIC T4 Gc – Zone 2
- Class I Division 2 Groups ABCD T4

ATEX

- Ex ia IIB T4 Ga⁽³⁾ – Zone 0, 1, 2
- Ex e mb [ib] IIC T4 Gb – Zone 1, 2
- Ex ic IIC T4 Gc – Zone 2

IECEX

- Ex ia IIB T4 Ga⁽³⁾ – Zone 0, 1, 2
- Ex e mb [ib] IIC T4 Gb – Zone 1, 2
- Ex ic IIC T4 Gc – Zone 2
- Ex tb IIIC T71°C Db – Zone 21, 22

Other Classifications/Certifications

- CUTR—Customs Union Technical Regulations (Russia, Kazakhstan, Belarus, Armenia)
- ESMA—Emirates Authority for Standardization and Metrology - ECAS-Ex (UAE)

Electrical Housing

IP66

Electromagnetic Interference (EMI)

- Meets EN 61326-1:2013
- Immunity—Industrial locations per Table 2 of EN 61326-1 S1 standard. Performance is shown in table below.
- Emissions—Class A
- ISM equipment rating: Group 1, Class A

Connections

Conduit: ■ 3/4 NPT or ■ M20

Wiring

14 to 26 AWG

Electrical Installation

Wire connections are polarity sensitive

Installation Orientation

Wiring entrance must be facing down

Dimensions

253.1 mm (10 inches) long by 109.5 mm (4.3 inches) wide by 127.8 mm (5 inches) deep. See figure 1.

Construction Materials

Housing material: filled polyester

Approximate Weight

2.2 kg (4.9 lbs)

-continued-

Specifications (continued)

Lights

Green: Solid when the valve is at its normal operating position, and loop current is normal. Flashing when the valve is not at its normal operating position, and loop current is normal.

Red: Solid when the valve is at its Fail Safe State and loop current is tripped. Flashing when valve is not at its Fail Safe State and loop current is tripped.

Yellow (Ready-to-Reset): Solid when the valve is latched in the trip position, and loop current is normal.

Pushbuttons

Protected with lockable covers


Green: After an emergency demand— commands the valve to its normal position only after control current is restored (manual reset).

Red: Always commands the valve to its Fail Safe State regardless of the control current.

Black: Commands the configured partial stroke test. Can be overridden by the Close button, Open button, or Emergency Demand.

1. The pressure/temperature limits in this document and any other applicable code or standard should not be exceeded.
2. DVC6000 SJS: Cable length is limited by maximum cable capacitance of 18000 pF.
3. LOOP Powered only.

Figure 1. Dimensions

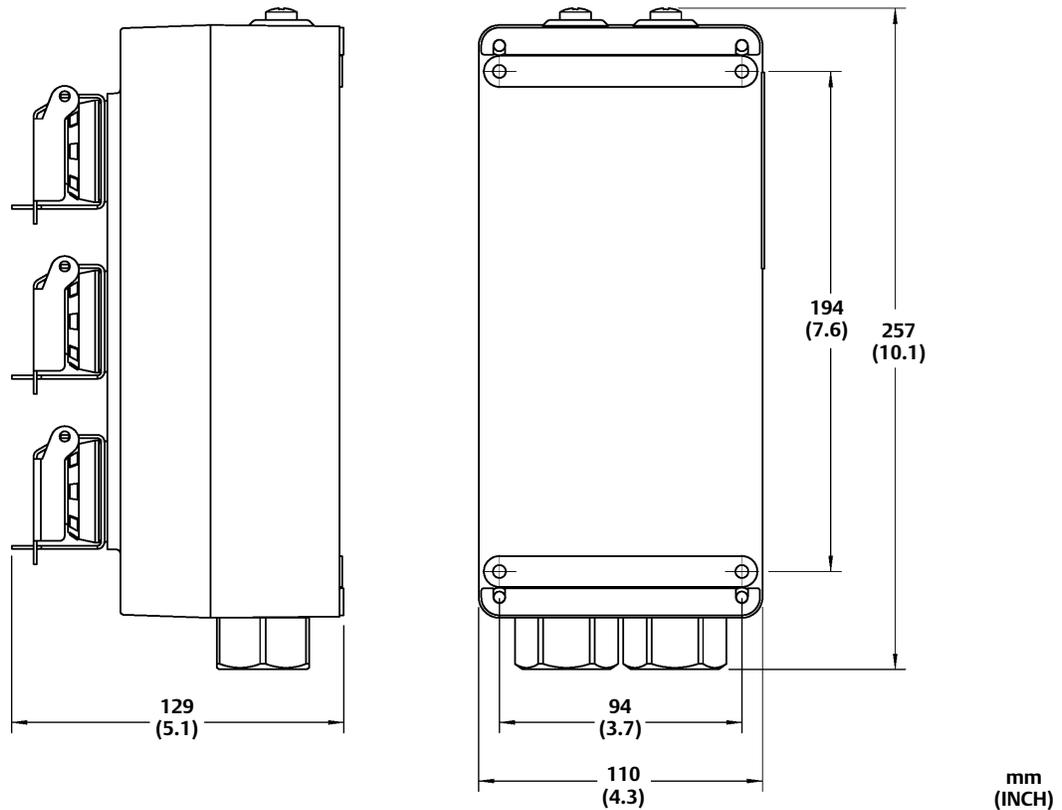

E1077-1

Table 1. Electromagnetic Immunity Performance for Fisher LCP100

Port	Phenomenon	Basic Standard	Test Level	Performance Criteria ⁽¹⁾
Enclosure	Electrostatic discharge (ESD)	IEC 61000-4-2	± 4 kV contact ± 8 kV air	A
	Radiated EM field	IEC 61000-4-3	80 to 1000 MHz @ 10V/m with 1 kHz AM at 80% 1400 to 2000 MHz @ 3V/m with 1 kHz AM at 80% 2000 to 2700 MHz @ 1V/m with 1 kHz AM at 80%	A
I/O signal/control	Burst (fast transients)	IEC 61000-4-4	± 1 kV, I/O lines ± 2 kV, DC power lines	A
	Surge	IEC 61000-4-5	± 1 kV, I/O lines ± 2 kV, DC power lines)	A
	Conducted RF	IEC 61000-4-6	150 kHz to 80 MHz at 3 Vrms with 1 kHz AM at 80%	A
Specification limit = ±1% of span 1. A = No degradation during testing. B = Temporary degradation during testing, but is self-recovering.				

Neither Emerson, Emerson Automation Solutions, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

Fisher, FIELDVUE, and Bettis are marks owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson Automation Solutions, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Automation Solutions
Marshalltown, Iowa 50158 USA
Sorocaba, 18087 Brazil
Cernay, 68700 France
Dubai, United Arab Emirates
Singapore 128461 Singapore

www.Fisher.com

